

# PPC

## PPC-7360

### VIA Eden™ Low Power 10.4" Compact Panel PC

#### Features and Benefits:

- Low power consumption
- Compact size Panel PC
- Built-in touchscreen (optional)
- One Compact Flash slot built onboard
- 1 x slim HDD
- I/O port highlights:
  - 2 powered serials,
  - 1 parallel,
  - 2 USBs,
  - 1 keyboard,
  - 1 mouse,
  - 1 10M/100M/1G Base-TX LAN,
  - 1 line-in/-out/mic
  - 1 x Compact Flash slot on rear panel with Hot Swap support
- Industry level of durability
- Against dust and powerful jetting



No. 24, Lane 365, Yang Guang St., Nei Hu District, Taipei 114, Taiwan, R.O.C.

Tel: +886-2-8751-1111

Fax: +886-2-8751-1199

Email: sales@protech.com.tw


<http://www.protech.com.tw>

ISO CERTIFIED  
9001 14001


# PPC-7360

## VIA Eden™ 10.4" Compact Panel PC


Front View

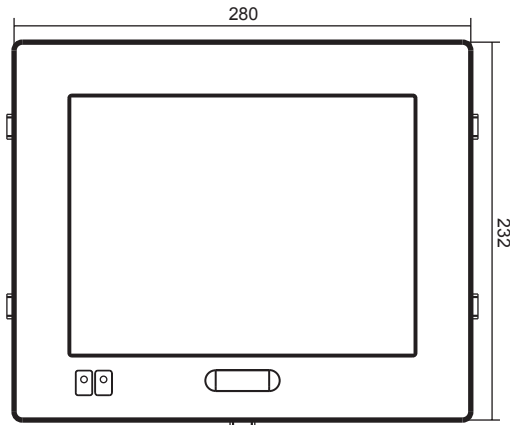

Rear View

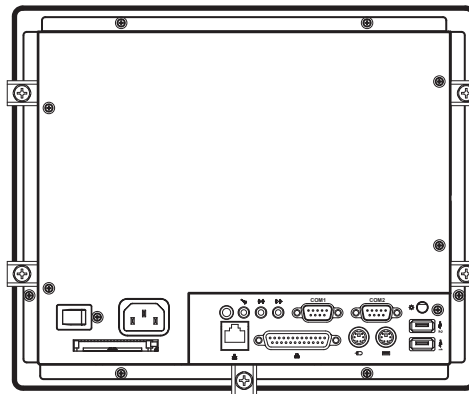

Side View

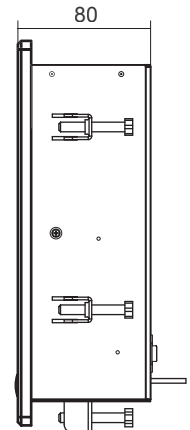

### Specification

Systems	
<b>CPU Support</b>	VIA Eden™ 733MHz on board
<b>Memory Support</b>	1 x DIMM, PC133 memory up to 512M SDRAM
<b>Front Bazel</b>	Aluminum
<b>Open Frame</b>	No
<b>IP65/NEMA4</b>	Yes
<b>Power Supply</b>	AC100W power supply (7360)/ DC 80W power supply (7360-DC)
<b>O.S. Support</b>	Win 98SE/2000/XP/CE.net, Linux 8.0/9.0
<b>Dimension (WxHxD)</b>	280 x 232 x 80 mm (11.02" x 9.13" x 3.15")
<b>System Weight</b>	6 Kg (13.22lb)
<b>VESA Mounting Support</b>	75mm/ 100mm
<b>Certificate</b>	CE/FCC/LVD/UL

### I/O Ports

<b>USB</b>	2 x USB1.1
<b>KB/Mouse</b>	2
<b>Audio</b>	Line in/Line out/MIC in
<b>Paralle</b>	1 x parallel port (SPP/EPP/ECP)
<b>Serial Port</b>	2 x COMs (pin 9 support +5V or +12V), COM2 for RS232/422/485
<b>Digital I/O</b>	N/A

<b>LAN</b>	10/100/1000 Mbps
<b>VGA</b>	N/A
<b>Brightness Control</b>	VR on rear panel
<b>Drive Bay</b>	1x 2.5" HDD, 1x IDE CF
<b>Expansion Slots</b>	PC104/ PC104+

### Display

<b>LCD</b>	10.4" SXGA TFT LCD
<b>Touch Screen</b>	Analog resistive (USB interface)

### Ordering

<b>PPC-7360</b>	panel PC with 10.4" LCD, VIA Eden 733 MHz CPU board, resistive touchscreen, 100W AC power supply
<b>PPC-7360-DC</b>	panel PC with 10.4" LCD, VIA Eden 733 MHz CPU board, resistive touchscreen, 80W DC power supply
<b>EFSP120-ACB</b>	120W, 24 Vdc output adaptor

All of trademarks and brand names are the property of their owners. Trademark "Protech" is the property of Protech Systems Co., Ltd. All information contained in this document is subject to change without any prior notice. This catalog is copyrighted in Jan. 2005.